
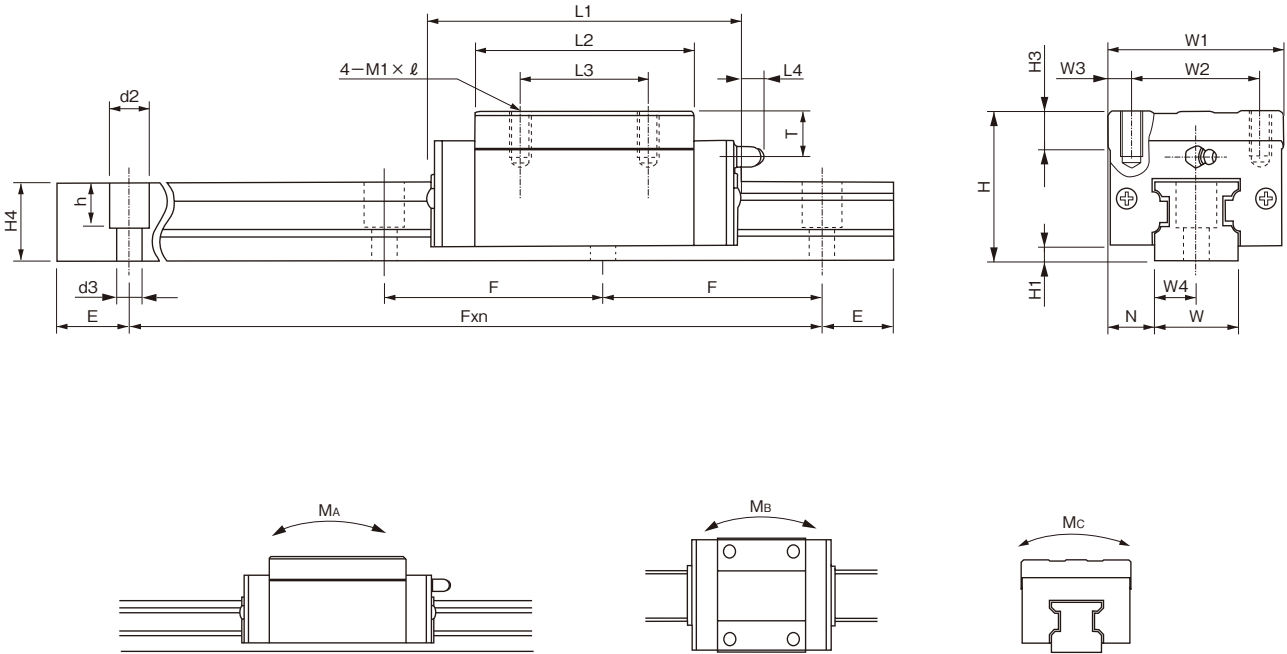


TSK Heavy-Load, Standard Rail, LMB Guide HS-LR series (Long Carriage type)

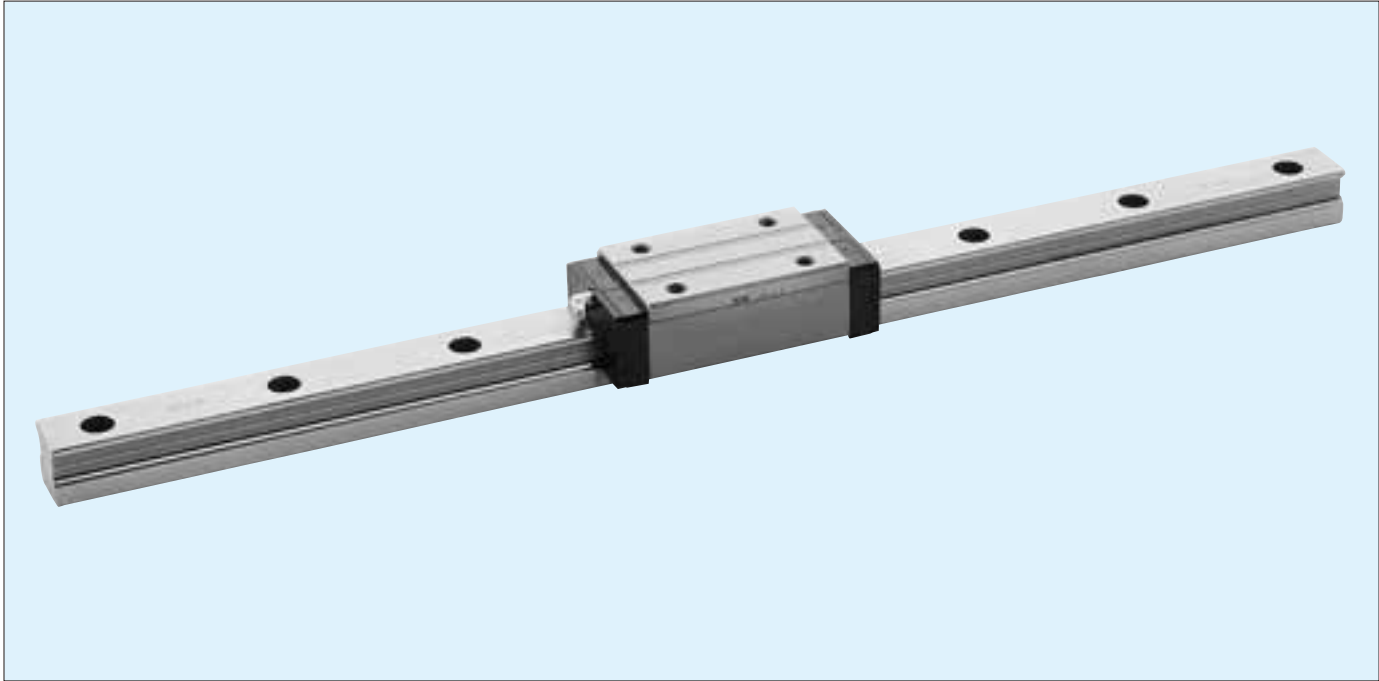

Model Number	Dimensions of Assembly			Carriage Dimensions									
	H	H1	N	W1	W2	W3	L1	L2	L3	L4	H3	M1×ℓ	T
HS25LR	40	6.5	12.5	48	35	6.5	108	83	50	12	8	M 6× 8	10
HS30LR	45	7	16	60	40	10	123	94	60	12	8	M 8×10	8.5
HS35LR	55	8	18	70	50	10	142	109	72	16	10	M 8×12	14.5
HS45LR	70	11	20.5	86	60	13	168	130	80	16	15	M10×17	18.5
HS55LR	80	14	23.5	100	75	12.5	192	156	95	16	18	M12×18	20
HS65LR	90	14	31.5	126	90	18	248	207	120	16	23	M16×20	18

Rail Dimensions								Basic Load Rating [N]		Static Rated Moment [N・M]			Weight	
W	W4	H4	d2	d3	h	E	F	C	Co	MA	MB	MC	Carriage [kg]	Rail [kg/m]
23	11.5	24	11	7	11	20	60	26730	54240	775	775	871	0.77	3.6
28	14	28	14	9	14	20	80	35630	69480	1094	1094	1337	1.2	5.1
34	17	32	14	9	15	20	80	49350	96420	1837	1837	2232	2.0	7.3
45	22.5	42	20	14	21	22.5	105	76180	141800	3189	3189	4268	3.6	12.6
53	26.5	48	23	16	24	30	120	112400	204200	5510	5510	7228	6.0	17.1
63	31.5	58	26	18	25	35	150	188800	339000	12110	12110	14560	12.0	24.6

Code Name

